

Feasibility of Mobility for Millimeter-wave Systems based on Channel Measurements

Sooyoung Hur, *Member, IEEE*, Hyunkyu Yu, *Member, IEEE*, Jeongho Park, *Member, IEEE*,
Wonil Roh, *Member, IEEE*, Celalettin U. Bas, *Student Member, IEEE*, Rui Wang, *Student Member, IEEE*,
Andreas F. Molisch, *Fellow, IEEE*

Abstract—Fifth generation mobile networks will be designed to utilize the benefits of the large available bandwidth in the mmWave spectrum. Commercialization of 5G mmWave technology will be launched soon, due to progress in RF hardware and large efforts on integration of mmWave beamforming technologies in standardization bodies such as 3GPP. The main challenges of mmWave mobility in 5G result from the impact of fast-varying channels on beamforming systems. Yet, the corresponding feasibility has not yet been fully investigated. In this article we first identify and review the technical challenges that remain in 5G mmWave mobile networks. We then present sample measurements of outdoor mmWave channels, and emulate the mobile system operation in them. We discuss insights, based on these results, under what circumstances supporting mmWave mobility is feasible.

I. INTRODUCTION

Due to the large available bandwidth, use of frequencies between 6 and 100 GHz (henceforth called mmWave band) is a key enabler for meeting the target that 5G cellular systems provide data rates that are 10 times higher than in 4G [1]. Commercialization of 5G mmWave technology will start between 2018 and 2020 with fixed wireless access (FWA) [2], [3], which provides high-speed internet service to homes where wireline services such as optical fiber cannot be easily deployed. While FWA systems need to overcome their own specific challenges, such as the impact of environmental characteristics of residential areas on mmWave signal attenuation, they are generally not designed, and thus not able, to handle mobile user scenarios.

For this reason, a lot of recent work on mmWave communications has concentrated on mobile networks [4]. At the same time, standardization of such mobile mmWave systems is actively discussed in 3GPP - NR (Third-Generation Partnership Project - New Radio) [5], the 5G standardization activities of 3GPP. Incorporating cutting-edge technologies in antenna design and massive-array signal processing [6], the NR mmWave standard is developed for mobility, covering users in LoS (line-of-sight) as well as NLoS (non-LoS), moving at pedestrian or vehicular speeds. These extended capabilities of mmWave systems will be achieved by using adaptive beamforming, beam-tracking and fast beam-switching, in mobile devices like smartphones. Recent prototype systems prove the possibility of

mmWave beam-tracking and handover while users are moving [7]–[9] in various environments, especially for high-speed mobility in LoS conditions, and demonstrated high throughput during system operation. However, there is still a lack of detailed and *realistic* studies of the feasibility of mmWave mobility support in outdoor cellular networks [4] and there are few experimental investigations of system aspects, such as under what circumstances practical beamforming procedures can track mmWave channel characteristics. The current paper is intended to provide such an investigation, describe the challenges of mmWave mobility support, and provides case studies based on a measurement campaign in an urban environment. We furthermore suggest the system operations required to support such mobility.

II. CHALLENGES FOR MOBILITY OF MMWAVE COMMUNICATIONS

A. mmWave Propagation Characteristics with Beamforming

While mmWave communication systems have significant technical benefits, it is also well-known that they encounter several challenges arising from radio propagation at mmWave frequencies, including severe free-space pathloss, and high penetration - and diffraction loss. In urban outdoor environments, high diffraction loss leads to a large percentage of locations that suffer from a stronger shadowing loss compared to the cm-wave band. This is true also for shadowing by street corners, such that streets with particular orientations can exhibit strong signal attenuation [10].

MmWave systems at least partly overcome these losses by applying directive antennas and/or adaptive beamforming with high gain at both transmitter (TX) and receiver (RX) [6]. Yet, challenges still remain in situations with significant temporal variations of the channel characteristics due to mobility, e.g., during transition from LoS to NLoS condition. Furthermore, moving objects such as cars, trucks, and people act as random blocking objects, introducing comparatively fast changes of the channel states. These shadowing variations are faster and deeper at mmWave frequencies because of the sharper shadows thrown by obstacles at higher frequencies. Due to the sparseness and directionality of the channel, it is essential that significant paths exist into the direction in which the TX and RX form their narrow beams. In other words, mis-orientation of the beams due to various factors (user equipment (UE) mobility, random blockers, and changes on channel pathway directions) leads to significant performance loss. Even

S. Hur, H. Yu, J. Park and W. Roh are with Samsung Electronics Co., Korea. e-mail:sooyoung.hur@samsung.com

C. Bas, R. Wang and A. Molisch are with the Department of Electrical and Computer Engineering, University of Southern California, CA, USA.

in LoS conditions where a beamformed channel has only few multipath components (i.e., ground-reflected and direct path), channel quality exhibits strong fluctuation due to small-scale fading [11].

B. Critical Issues for Mobility in mmWave Cellular Networks

In this section, we review the mobility support features in cellular networks to better understand the related issues of system performance. We focus on link adaptation including Adaptive Modulation and Coding (AMC), Hybrid Automatic Repeat reQuest (HARQ), and beam training and tracking in Beam Management (BM).

To optimize system capacity and cellular coverage, the base station (BS) should try to match the data rate to the variations in received signal quality. AMC operation in link adaptation allows to maintain the block error rate (BLER) below a predefined target value by adapting the modulation order and coding rate according to the sampled channel quality. In mmWave mobility scenarios, with rapid channel variation on beamformed channels, link adaptation can be critical to retain reliable transmission.

Adaption to the channel is based on feedback of channel state information (CSI) to the TX,¹ where the protocol itself also inevitably leads to latency between the measurement of the channel and the application of the proper transmit power, modulation and coding rate.

In addition to the AMC operation, HARQ also provides more robustness against fading. HARQ is a combination of Forward Error Correction (FEC) and Automatic Repeat Request (ARQ) that saves information from previous failed decoding attempts for use in future decoding after packet retransmission. In HARQ with energy accumulation, the signals from different retransmissions are added up with maximum ratio combining to improve the effective signal-to-noise ratio (SNR). For HARQ with incremental redundancy, additional parity check bits are sent during retransmission. The original signal is recovered successfully if the accumulated energy (for energy accumulation) or mutual information (for incremental redundancy) exceeds the required thresholds. However, if (due to channel variations) the quality of the received signal is too poor to acquire sufficient energy or mutual information during the (finite) allowed retransmissions, the HARQ operation will not be successful. Thus, fast-changing channel variations can introduce another challenge for AMC and HARQ.

For adaptive beamforming, it is usually necessary to use analog beam sets to estimate angle of departure (AoD) at TX and angle of arrival (AoA) at RX of the dominant channel components. BS and UE sample the channel subspace adaptively using transmit and receive beam sets within assigned resources. This is done, e.g., when the BS sends training beams consecutively in different designated directions and the UE estimates the AoD/AoA by scanning its own beam directions for each BS beam direction, and measuring the received power.

Then, the BS is fed back the index of the best TX beam and accordingly aligns its transmit beam for data transmission. These beam training operations are called *beam management* procedure. Beam management in mmWave systems usually suffers from limitations of spectral resources and requirement to frequently repeat the channel subspace sampling, which can be critical in fast-varying fading channels [12]. In contrast, in FWA networks, the channel can sometimes be assumed to be quasi-static, so infrequent channel sampling is sufficient. Note that after the initial access procedure and proper beam alignment, conventional wireless data transmission (including the AMC and HARQ procedures described above) can be performed on the beamformed channel link.

Considering mobile scenarios, such as outdoor pedestrian users carrying mobile devices, and vehicular-to-infrastructure (V2I) communication, the BS and the UE should perform periodic beam training within the beam stationarity time duration, i.e., the time during which the beam-related channel statistics remain the same. The BS should transmit training beams more frequently to update AoD/AoA estimates since the location of UEs keeps changing. In practical scenarios, the sampled CSI with specific beam pairs might be easily outdated, which might cause beam misalignment, and significant performance loss until the beam is recovered.

C. mmWave Mobility-supporting Protocol and Conditions

This section identifies the detailed procedures of the system protocol developed in 3GPP NR [5] for the items reviewed previously, and presents the metric for supporting mobility in outdoor mmWave cellular networks and the system impact. In cellular networks, such as LTE and NR, the UE can report channel quality indicators (CQIs) to assist the BS in choosing an appropriate modulation and coding scheme (MCS) level for the data transmission. The UE determines CQI such that it corresponds to the highest MCS allowing the UE to decode transport blocks with error probability not exceeding 10%. Due to the inherent latency between the reported measurement of CQI and the actual use of the MCS, and the channel variation during that time, the system relies on the system margin of the BS's scheduler to handle the inaccuracy of the CQI report.

The key metric for the feasibility of mobility in AMC operations is whether the connected link is maintained over the latency time of the protocol operation. Thus, the feasibility of the AMC operation depends on the change rate of the beamformed channel. We investigate how much the channel power changes for a given latency in the following sections.

If the transmission of a transport block fails, then the RX indicates this with a HARQ NACK (negative acknowledgment). When a NACK is received, or when a certain time elapses without any feedback from the RX, the TX retransmits the transport block. The RX combines the new symbols with the original symbols, and tries to decode the block again. For validating the mobility support in HARQ operations, we investigate below the performance with respect to the amount of loss in fading channels during the transmission and retransmission by comparing the accumulated energy obtained from retransmissions. Then, the residual error of the HARQ

¹For the case of time division duplex systems, exploitation of channel reciprocity, together with suitable reciprocity calibration protocols, can also be used. However, also in this case, the protocol (turnaround time of the time duplexing) leads to additional latency.

process will be derived. To simplify the analysis, we assume that no additional latency from the HARQ timer is introduced awaiting the retransmission.

As a further impact on link adaptation techniques, the mobility of the users also changes the path directions, which necessitates frequent beam-tracking. However, as described in the previous subsection, on each resource, one RSRP (reference signal received power) sample is measured for a specific BPL because the beamforming technologies in most mmWave systems limit the transmission to a single beam direction per time unit and radio chain. The UE reports the information of the N -best BPL's index and corresponding RSRP to the BS, which can make the BS to choose a proper TX beam among N RSRPs of the best beams. Note that the RX beam at the UE side can be changed by measuring RSRPs at every update, while the TX beams can only be changed after the BS is provided the TX beams' RSRPs.

For beam management, the system has to sweep, within a certain period, all combinations of BPLs with limited resources. Due to channel variations, the measured samples become outdated even as this process is going on, and the UE and BS thus choose the best BPL among the outdated measurements. In Fig. 1, an example of the beam-tracking based on BPL measurement shows the received power measured while sweeping all combinations of directional beam-pairs on TX and RX. This example depicts only the two strongest BPLs from the measurement campaign [11], which will be discussed in detail in Sec. III-A; it depicts a part of the transition area of LoS to NLoS area (6 m movement), around 60 m in distance index as the UE is moving on the route in Fig. 2(a). It demonstrates that the beamformed channel states vary fast, especially in the transition area where diffraction and shadowing occur. The solid lines represent the instantaneous channel per BPL sampled every 5 ms. In a practical BM procedure, the instantaneous channel variation on each BPL is not easily observed in the UE operation because of the large spectral resources such sounding would require. Instead, all channels of BPLs are sampled at the yellow points with a sweeping periodicity (whose value is an important system design parameter), and each BPL sample is measured sequentially with the assigned resources. The dotted lines are the perceived channels measured once within the sweeping period (i.e., 160 ms in this example) by the UE. The fast variations and the longer updating period of the beamformed channel cause the mismatch between the instantaneous channel and the perceived sampled channel. As shown in Fig. 1, the current operating TX/RX beams (BPL 2) are selected among the measured BPLs within a full-sweep period until a better channel is measured. Around 6100 ms in Fig. 1, another beam (BPL 1) is selected based on the measured channel; however, the channel is fading rapidly while the BPL measurement is not updated due to a sweeping period that is slower than the channel change rate. Thus, the BM operation with outdated beam-tracking (green solid line in Fig. 1) induces inefficiency. The key question for supporting mobile beam-tracking is whether the loss of beam-tracking efficiency is frequent and critical for link robustness. The following section analyzes the BM operation with mobility and the conditions for conducting

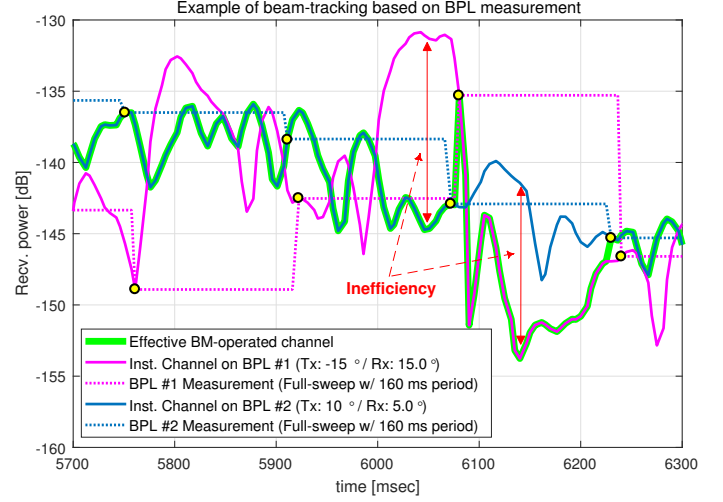


Fig. 1. Example of beam-tracking operations with mobility in mmWave wireless systems.

efficient BM operation.

III. FEASIBILITY ANALYSIS OF MMWAVE MOBILITY

A. Beam Tracking Analysis Based on Outdoor mmWave Measurement

The main focus of this section is to provide insights from a mobility measurement campaign concerning the operation of mmWave systems in order to design a robust and efficient beamformed system. Analysis of mmWave beamforming system performance requires accurate measurements of the angular power spectra and their temporal variations. Recently, some measurement works have been conducted based on advanced phased-array antenna beamforming [9], however, most of the directional outdoor measurements for mmWave frequencies were performed with rotating horn antenna channel sounders [14], which are not able to measure in real-time and thus are not well suited for analysis of dynamic channels, and/or the acquisition of the large number of spatial samples required for a tracking analysis. Thanks to a new channel sounder operating in the 28 GHz band that is capable of performing directionally-resolved channel measurements in real-time [13], a mobility measurement campaign was conducted with extensive samples in a typical urban-like environment with moving UE. The main specifications for the sounder and sounding signal are listed in Table I, and further details of the sounder and its validation can be found in [13].

The measurements were performed on the campus of the University of Southern California, in Los Angeles, CA, in an area that resembles a typical urban environment, including a LoS-to-NLoS transition area. The case study for mobility feasibility was conducted in a mixed region containing 53 m of LoS route and 40 m of NLoS or transition route, which is marked with a light-blue color arrow line in Fig. 2(a). While moving along the route, all channel links (up to 703 combinations of beamformed links with 19 TX beams and 37 RX beams) are measured. One MIMO channel snapshot (i.e., all beam pair combinations) is captured in a spatial sampling

from the downlink reference signals and the prevailing channel condition of the downlink data transmission, i.e., amount of inaccuracy of the CQI report, given the operation latency. In the analysis, it is assumed that the AMC operation be initiated at any data sample used for CQI report, and all samples are used for the analysis. For simplicity of analysis, we use the power loss metric instead of BLER, and perfect feedback of CQI reports from UEs to BS is assumed. For acquiring more data for statistical information, all 11 best BPLs channel powers are collected. In Fig. 3(a), the CDF of the power loss for different protocol latencies is represented.

Considering a system based on the 3GPP NR profile, the AMC latency is set to around 4 slots, which is the delay between the UE's measurement of the downlink RS and the report of CQIs. Further latency-increasing protocol aspects, including the scheduling process, are assumed to contribute another 4 slots. With 0.25 ms duration of a slot for the case of 60 kHz sub-carrier spacing in the mmWave profile, the total latency from the channel measurement to the actual downlink data transmission is typically up to 2 ms. Adding the periodicity of CQI reports as 10 ms, the maximum latency of AMC protocol would be 12 ms. On Fig. 3(a), it can be found that a 1.5 dB power loss is observed on the measurement of downlink reference signals for the 15 ms protocol latency case. It is also observed that even 50 ms operation latency only introduces less than 3 dB power loss on channel measurements. By increasing the UE speed beyond 36 km/h, the operation latency can be properly scaled. For example, the power loss for 15 ms protocol latency around 100 km/h can be estimated as 3 dB in the simple analysis. In the previous section, it was discussed that the system margin is usually considered for stable AMC operation. Based on the measurements it is expected that mmWave cellular system with mobility requires less than a few dB system margin for operating the AMC protocol properly in a typical urban scenario, and this amount of system margin in AMC operation is feasible for system implementation.

2) *Feasibility of HARQ Protocol:* Even with stable AMC operation, transmission errors are unavoidable and these fails (i.e., samples over the 90 percentile of the power loss) are handled by the HARQ retransmission protocol. We investigate how much error is inevitable while retransmission gains are added, and then whether the residual error after retransmission is large enough to create a failure of the connection in a mmWave mobility scenario. For performance evaluations of system-level operation, a simple model is used to check the feasibility of HARQ. We use the power loss during the duration from the channel measurement (for CQI report) to the retransmission for the samples that failed to be decoded in the original transmission. We consider that the retransmission operation includes the latency of HARQ feedback and scheduling, where we assume that additional 8 slots for HARQ round-trip time, i.e., 2 ms latency, as in Sec. III-B1, is required. For the case of 50 ms AMC latency operating with 3 dB margin in each MCS level, thus, from Fig. 3(a), 10% of the samples fail. The failed samples of the AMC operation undergo retransmission with HARQ procedures within additional latency, then the samples which have more power loss than retransmission

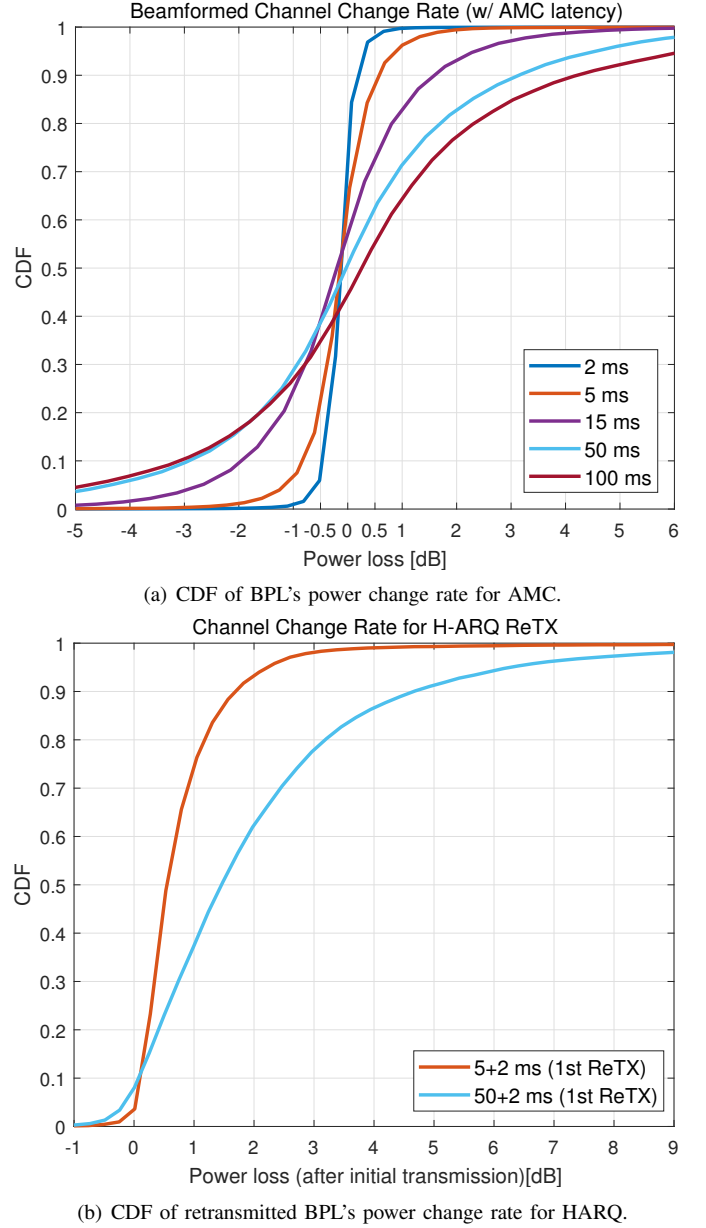


Fig. 3. CDF of channel power change rate on beam-pair links.

gain are treated as fail after the first retransmission. In Fig. 3(b), the CDFs of the power loss for the retransmission cases are plotted, which is compensated the system margin from the original transmission. The accumulated energy is doubled for the first retransmission, and the gain is simply derived as 3 dB in the analysis. For the case of 50 ms latency case in AMC operation, there is roughly 1.8 % residual error after the first retransmission (i.e., 10 % failure of the original transmission times with 18 % error on the retransmission). Similarly, if the power losses of 5 ms latency are compensated by 0.5 dB margin, 98 % of samples are successful for retransmission, and it has 0.2 % residual error after the first transmission. From these observations, the HARQ operation will be feasible with less than 1 percent residual error for the shorter latency cases, i.e., less than 10 ms latency.

C. Case Study II : Beam Change-rate

Inherently, practical beam-tracking operations induce a delay on updating the channel per BPL because each BPL is only updated once during the measurement period. The measured BPL is easily out-dated in fast-varying channel environments, and it introduces beam mismatches in BM as shown in Fig. 1. For analyzing the beam-tracking operation, the performance metric is defined as inefficiency of beam-tracking caused from beam mis-alignment, which is the difference between the genie-aided beam-tracked channel with the instantaneous measurement and the practically beam-tracked channel based on the RSRP measurement. Note that the previous example case in Fig. 1 was analyzed only in the LoS-to-NLoS transition region. We now show the general analysis on BM over the complete route including LoS, NLoS, and transition area. In Fig. 4, the beamformed received powers for two beam sweeping periods, and the power loss from BM inefficiency are presented. Similar to the observations of the previous section, the LoS region is well matched between the genie-aided beamforming case and effective beamforming case, because no frequent beam changes occur in a short period. Overall, due to constraints on the BM operation, the practical beam tracking cannot be perfect due to various latency factors. In the analysis, all TX beams are swept every 10 ms (synchronization signal block periodicity from the NR profile), and the UE changes all RX beams for each TX sweep to measure all combinations of TX and RX beams. The number of RX beams emulated in Fig. 4 is, 8 and 16 for 80 ms sweep period and 160 ms sweep period, respectively. As expected, it is observed that longer sweep periods have more frequent, and longer duration of, misalignment.

The performance and efficiency of the beam-tracking operation are related to three latencies, beam sweep-period, BPL updating period (i.e., UE updates the best BPL index to BS), and BPL time-filtering. The performance loss is investigated statistically and we evaluate the effect of these latencies by changing the sweep-period and the updating report period in Fig. 5. In LoS conditions, the loss from beam-misalignment is less than 1 dB in the 90 percentile. More loss can be expected in NLoS conditions, and longer latency causes larger power loss in NLoS cases. From the analysis, the sweeping period has more impact on BM operations. In order to maximize efficiency, all factors should be taken into account. Considering the practical mmWave mobility support including severe NLoS cases, additional loss should be accounted for in system design for mmWave cellular networks, up to 6 dB in NLoS, up to 1 dB in LoS, with 10% probability.

IV. INSIGHTS ON MMWAVE SYSTEM DESIGN

The following conclusions can be drawn for mmWave systems with mobility when operating according to a 5G NR-like protocol:

- Supporting AMC operation properly requires less than a few dB system margin in a typical urban mobile scenario.
- The HARQ protocol will be operable with less than 1 percent residual error for the shorter latency cases (less than 10 ms latency).



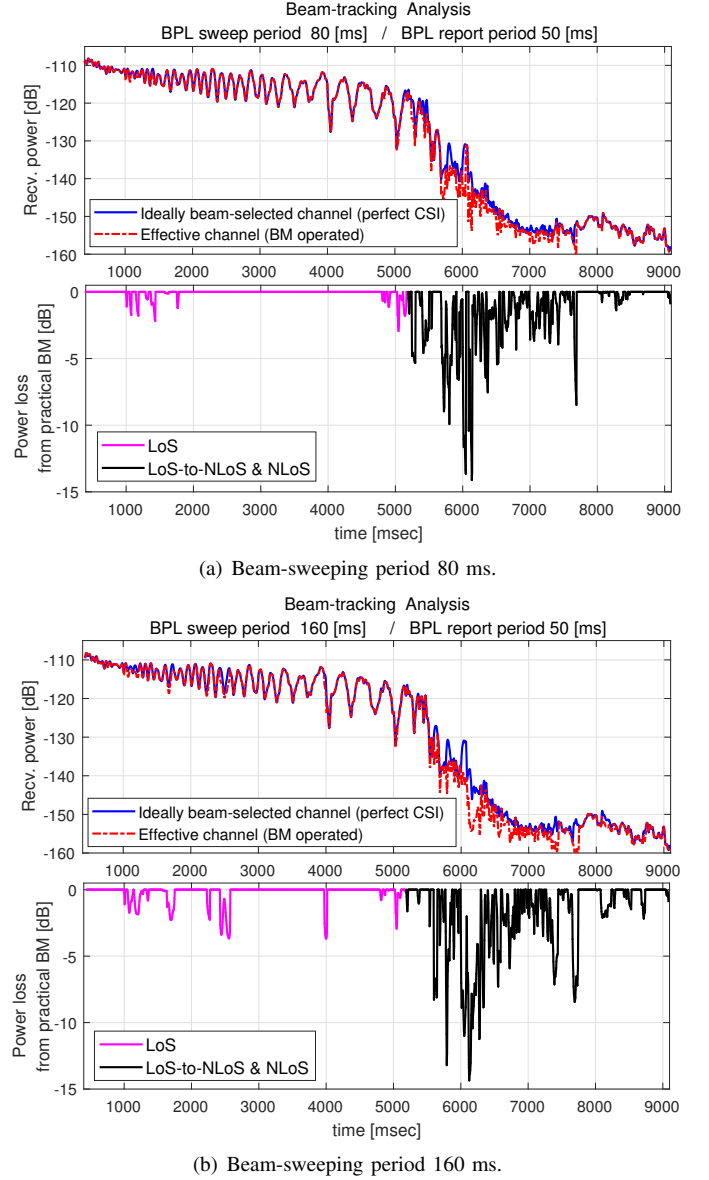


Fig. 4. Performance analysis of beam-tracking along the moving route.

- From the observations of the measurement campaign, the changes of best-beam direction at the UE is much more frequent, and it is preferable to design UE antenna arrays with wide angular reception. The trade-off between the beamforming gain and the full-sweep periodicity (i.e., related to the number of beams to be swept) for efficient beam-tracking without beam-mistracking loss deserves further study.
- When frequent changes of the BLPs occur, a pool of alternative beams to be switched should be provided by the BM algorithm. Utilizing angular diversity provides significant gains in particular in NLoS condition; this can be implemented, e.g., by sub-array diversity [15].
- More beam-mistracking loss can be expected in NLoS conditions, and longer latency causes larger power loss in NLoS cases. In practical mmWave BM procedure design, it should be accounted for up to 6 dB in NLoS with 10% probability.

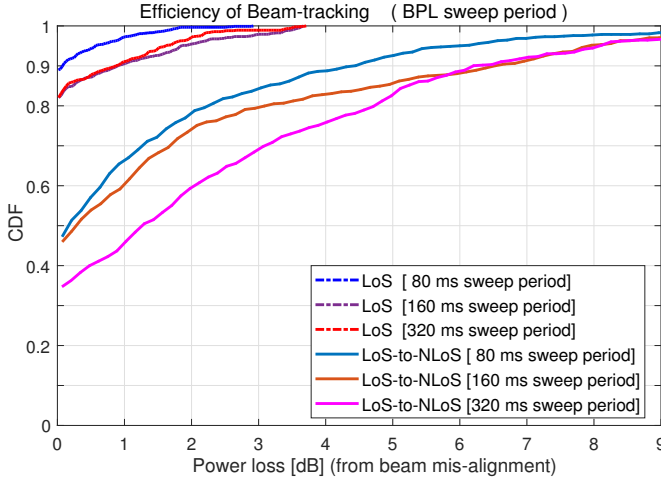

(a) CDF of beam management power-loss on BPL sweep period.

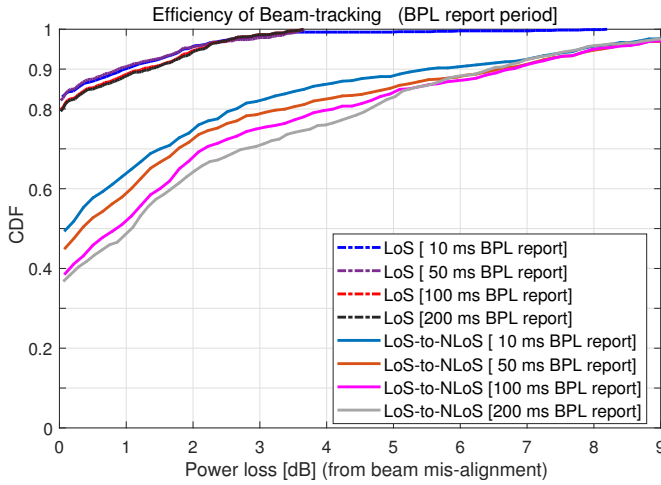

(b) CDF of beam management power-loss on BPL report period.

Fig. 5. Analysis of beam-tracking mismatches in beam-management.

V. CONCLUSION & FUTURE WORK

Despite recent advances in mmWave communications systems, many technical challenges have to be solved to launch initial commercial 5G services around 2018. In particular, significant efforts are ongoing in 3GPP to prepare mmWave cellular networks for user mobility. This paper summarized the critical issues for supporting mobility, namely fast beam tracking and fast link-adaptation. It also provides some insights, based on results of a measurement campaign, that supporting mmWave mobility is feasible for typical vehicular speeds in an urban environment when employing the 5G NR system settings. Some remaining issues, which are not treated in this paper, include analysis of handover procedure in mmWave networks, UE-rotation effect, and sensitivity analysis of beam width at the mobile user.

REFERENCES

[1] W. Roh, J. Seol, J. Park, B. Lee, J. Lee, Y. Kim, J. Cho, K. Cheun, and F. Aryanfar, "Millimeter-wave beamforming as an enabling technology for 5 G cellular communications: Theoretical feasibility and prototype results," *IEEE Communication Magazine*, vol. 52, no. 2, pp. 106113, Feb. 2014.

[2] P. Wang, Y. Li, L. Song, and B. Vucetic, "Multi-gigabit millimeter wave wireless communications for 5G: from fixed access to cellular networks," *IEEE Communications Magazine*, vol. 53, no. 1, pp. 168-178, Jan. 2015.

[3] Verizon 5G Technical Forum. [Online]. Available: <http://www.5gta.net>

[4] M. Xiao, S. Mumtaz, Y. Huang, L. Dai, Y. Li, M. Matthaiou, G. K. Karagiannis, E. Bjornson, K. Yang, C. I, and A. Ghosh, "Millimeter Wave Communications for Future Mobile Networks," *IEEE Journal on Selected Areas in Communications*, vol. 35, no. 9, pp. 1909-1935, Sep. 2017.

[5] 3GPP RAN, NR Work Item Description, 2016. [Online]. Available: <http://www.3gpp.org>

[6] J. Zhang, X. Ge, Q. Li, M. Guizani, and Y. Zhang, "5G Millimeter-Wave Antenna Array: Design and Challenges," *IEEE Wireless Communications*, Vol. 24, no. 2, pp. 106-112, April 2017.

[7] Samsung, "Analysis of mmWave Performance : Feasibility of Mobile Cellular Communications at Millimeter Wave Frequency", July 2017. [Online]. Available : <http://www.samsung.com/global/business-images/insights/2017/Analysis-of-mmWave-Performance-0.pdf>

[8] Qualcomm, Nokia, "Making 5G a reality : Addressing the strong mobile broadband demand in 2019 and beyond", Sep. 2017. [Online]. Available on : www.qualcomm.com/documents/making-5g-reality-addressing-strong-mobile-broadband-demand-2019-beyond

[9] V. Raghavan, A. Partyka, A. Sampath, S. Subramanian, O. Koymen, K. Ravid, J. Cezanne, K. Mukkavilli, and J. Li, "Millimeter-Wave MIMO Prototype: Measurements and Experimental Results," *IEEE Communication Magazine*, vol. 56, no. 1, pp. 202-209, Jan. 2018.

[10] A. Karttunen, A. F. Molisch, S. Hur, J. Park, and J. Zhang, "Spatially Consistent Street-by-Street Path Loss Model for 28 GHz Channels in Micro Cell Urban Environments," *IEEE Transactions on Wireless Communications*, Nov. 2017.

[11] R. Wang, C. U. Bas, S. Sangodoyin, S. Hur, J. Park, J. Zhang, and A. F. Molisch, "Stationarity Region of Mm-Wave Channel Based on Outdoor Microcellular Measurements at 28 GHz," *IEEE MILCOM*, Oct. 2017.

[12] S. Hur, T. Kim, D. J. Love, J. V. Krogmeier, T. A. Thomas, and A. Ghosh, "Millimeter wave beamforming for wireless backhaul and access in small cell networks," *IEEE Transactions on Communications*, vol. 61, no. 10, pp. 43914403, Oct. 2013.

[13] C. U. Bas, R. Wang, D. Psychoudakis, T. Henige, R. Monroe, J. Park, J. Zhang and A. F. Molisch, "A Real-Time Millimeter-Wave Phased Array MIMO Channel Sounder", *IEEE VTC-FALL*, Sep. 2017.

[14] T. S. Rappaport, G. R. Maccartney, M. K. Samimi, and S. Sun, "Wide-band millimeter-wave propagation measurements and channel models for future wireless communication system design," *IEEE Transactions on Communications*, vol. 63, no. 9, pp. 30293056, Sep. 2015.

[15] V. Raghavan, A. Partyka, L. Akhondzadeh-Asl, M. Tassoudji, O. Koymen, and J. Sanelli, "Millimeter Wave Channel Measurements and Implications for PHY Layer Design," *IEEE Transactions on Antennas and Propagation*, vol. 65, no. 12, pp. 6521-6533, Dec. 2017.

Sooyoung Hur (sooyoung.hur@samsung.com) received the B.S degree from Sogang University, Seoul, Korea, in 2005, and M.S. degree from Korea Advanced Institute of Science and Technology (KAIST), Daejeon, Korea in 2007, both in electrical engineering. He received a Ph.D in electrical and computer engineering from Purdue University, West Lafayette, IN in 2013. Since 2013 he has been with Samsung Electronics. His research covers channel modeling and wireless system design for 5G and future wireless communication.

Hyunkyu Yu (hk.yu@samsung.com) received his B.S., M.S., and Ph.D. degrees in electrical and electronic engineering from Yonsei University in 2000, 2002, and 2006, respectively. Since 2006 he has been a principal research engineer at Samsung Electronics. His primary interests are focused on next generation wireless communication systems.

Jeongho Park (jeongho.jh.park@samsung.com) received his Ph.D. degree in electronic engineering from Yonsei University. Since he joined Samsung Electronics in 2005, he has mainly been engaged in development of wireless communications and standardization including IMT-Advanced systems. Currently, he is the director at the Samsung Electronics Network Business, and his research interest includes beyond-4G and 5G technologies.

Wonil Roh (wonil.roh@samsung.com) is currently a vice president at Samsung Electronics in Korea, responsible for research of next generation mobile communications technologies since 2011. He started working at Samsung in 2003 on development of CDMA and mobile WiMAX base stations, and led overall WiMAX standardization while serving as Chair of the Technical Working Group of the WiMAX Forum from 2006 to 2011. He holds a doctorate in electrical engineering from Stanford University, California.

C. Umit Bas (cbas@usc.edu) received the B.Sc. and M.Sc. degrees in electrical and electronics engineering from Koc University, Istanbul, Turkey, in 2010 and 2012, respectively. He is currently pursuing the Ph.D. degree with the Department of Electrical Engineering, University of Southern California, Los Angeles, CA, USA. His research interests include real-time channel sounders for mmWave and UWB communications, wireless propagation channel measurements and modeling.

Rui Wang (wang78@usc.edu) received the B.S. degree from Southeast University, Nanjing, China in 2010 and the M.S. degree (with honors) in 2012 from the University of Southern California, Los Angeles. He is currently a Ph.D. Candidate with the WiDeS Group at Ming-Hsieh Department of Electrical Engineering, University of Southern California. His research interests include wireless channel measurements and modeling for vehicle-to-vehicle and mm-wave systems. He is also interested in statistical signal processing and optimization algorithms.

Andreas F. Molisch [F05] (molisch@usc.edu) is the Solomon-Golomb Andrew-and-Erna Viterbi Chair Professor at the University of Southern California, Los Angeles. His research interests include wireless propagation, multi-antenna systems, ultrawideband communication and localization, and wireless video distribution. He has published 4 books, more than 500 journal and conference papers, and more than 80 patents. He is a Fellow of the National Academy of Inventors, AAAS, and IET, and a member of the Austrian Academy of Sciences.